


# Don't Wait — Check the Date!

Replace Smoke Alarms Every 10 Years

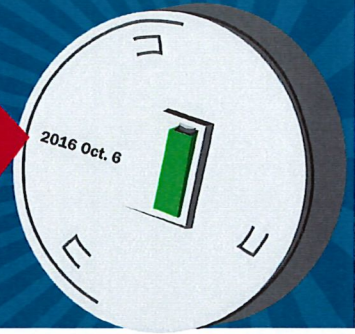

**Fire Prevention Week**  
**Oct. 9-15, 2016**


Age matters when it comes to your smoke alarms.  
Check the manufacture dates on your smoke alarms today!

**1**

Remove the smoke alarm from the wall or ceiling.



October 6, 2016

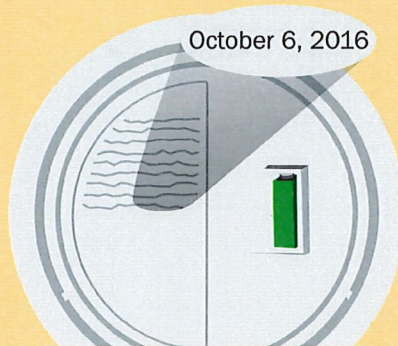

**2**

Look at the back of the alarm for the date of manufacture.

**3**

Smoke alarms should be replaced 10 years from the date of manufacture.



**4**

Put the alarm back on the ceiling or wall if it is less than 10 years old.



A closed door may slow the spread of smoke, heat and fire.



Test smoke alarms at least once a month by pushing the test button.



If the smoke alarm sounds, get outside and stay outside. Go to your outside meeting place.



Install smoke alarms in every bedroom, outside each separate sleeping area, and on every level of the home, including the basement. Larger homes may need more alarms. For the best protection, make sure all smoke alarms are interconnected. When one sounds, they all sound.



Call the fire department from a cellphone or a neighbor's phone. Stay outside until the fire department says it's safe to go back inside.

For more information about smoke alarms, visit [usfa.fema.gov](http://usfa.fema.gov) and [firepreventionweek.org](http://firepreventionweek.org).

U.S. Fire Administration



FEMA



NFPA is the official sponsor of Fire Prevention Week since 1922



# Smoke Alarms at Home

**SMOKE ALARMS ARE A KEY PART** of a home fire escape plan. When there is a fire, smoke spreads fast. Working smoke alarms give you early warning so you can get outside quickly.

## SAFETY TIPS

- » Install smoke alarms inside and outside each bedroom and sleeping area. Install alarms on every level of the home. Install alarms in the basement.
- » Large homes may need extra smoke alarms.
- » It is best to use interconnected smoke alarms. When one smoke alarm sounds they all sound.
- » Test all smoke alarms at least once a month. Press the test button to be sure the alarm is working.
- » There are two kinds of alarms. Ionization smoke alarms are quicker to warn about flaming fires. Photoelectric alarms are quicker to warn about smoldering fires. It is best to use both types of alarms in the home.
- » A smoke alarm should be on the ceiling or high on a wall. Keep smoke alarms away from the kitchen to reduce false alarms. They should be at least 10 feet (3 meters) from the stove.
- » People who are hard-of-hearing or deaf can use special alarms. These alarms have strobe lights and bed shakers.
- » Replace all smoke alarms when they are 10 years old.



## FACTS

- ❗ A closed door may slow the spread of smoke, heat, and fire.
- ❗ Smoke alarms should be installed inside every sleeping room, outside each separate sleeping area and on every level. Smoke alarms should be connected so when one sounds, they all sound. Most homes do not have this level of protection.
- ❗ Roughly 3 out of 5 fire deaths happen in homes with no smoke alarms or the alarms are not working.



Name of Organization Goes Here

Contact Information Goes Here



**Your Source for SAFETY Information**

NFPA Public Education Division • 1 Batterymarch Park, Quincy, MA 02169